


ALUTRUSS Traverse 4 voies TQTR-1000 TOWERTRUSS

Tour à traverses 4 points

Réf. : 60304410

GTIN: 4026397199734

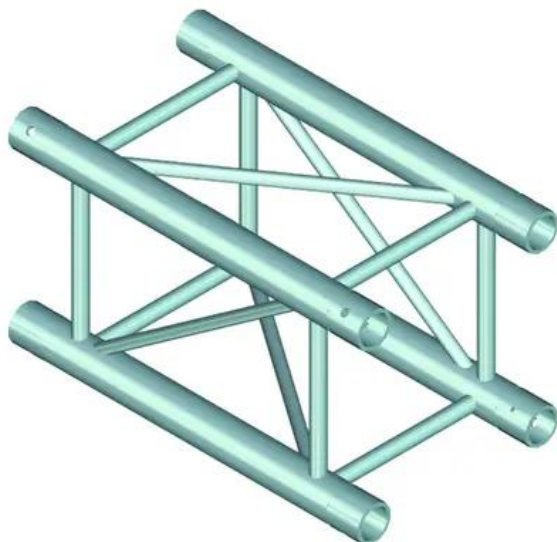

Prix de catalogue: 398.65 €

TVA 19% incl.

Description:

TOWERTRUSS TQTR 4-point truss system

TOWERTRUSS TQTR is a 4-point truss system made of aluminum. The individual elements are connected via four cones, pivots and pins. TOWERTRUSS TQTR is made of EN-AW 6082 T6 (AlMgSi1 T6) alloy with 20 mm braces for high loads.

The advantage of the conical connection system is that the cones completely fit into the main chords so that highest load capacity is guaranteed. The Quick-Lock system enables fast, efficient and highly aesthetic assembly when the truss constructions are frequently assembled and dismantled.

The four main chords are made of 50 mm aluminum tube with 4 mm wall thickness and offer a good relation between strength and weight. The braces have a diameter of 20 mm with 2 mm wall thickness and leave enough space for installing couplers, hooks and clamps.

With 290 mm outer dimensions, TOWERTRUSS TQTR is a stable truss system for high loads and extended durability. This system is mainly designed for building the Tower System I and II and for intense use in stage installations, fair installations, event installations.

The production of this truss system is TUV-monitored. The load table as calculation base can be downloaded from the Internet before buying the product!

Please note: this truss system must never be combined with other systems!

Logistique

EAN / GTIN: 4026397199734

Poids: 10,85 kg

Longueur: 1.00 m

Largeur: 0.30 m

Hauteur: 0.30 m

Caractéristiques:

- Pour la construction de Ground Supports
- Assemblage simple
- Tube porteur: 50 mm
- Convient pour Towertruss TQTR
- Chaque couleur RAL disponible sur demande
- Certifié TÜV Süd
- Pour des domaines d'application tels que: Agencement de salons et magasin
- Vous trouverez de plus amples informations sur ce produit dans la rubrique « Téléchargements » de la fiche technique

Données techniques:

Construction:	Assemblage simple
Tube porteur:	50 mm x 4 mm
Procédé de soudure:	Impulsion WIG
Matière de soudure:	AlMg 5
Couleur:	Couleurs alu; chaque couleur RAL disponible sur demande
Entretoise diamètre x épaisseur:	20 x 2 mm
Dimension:	Longueur : 100 cm Largeur : 29 cm Profondeur : 29 cm
Poids:	9,95 kg

Contenu de la livraison:

1 x set de connecteurs