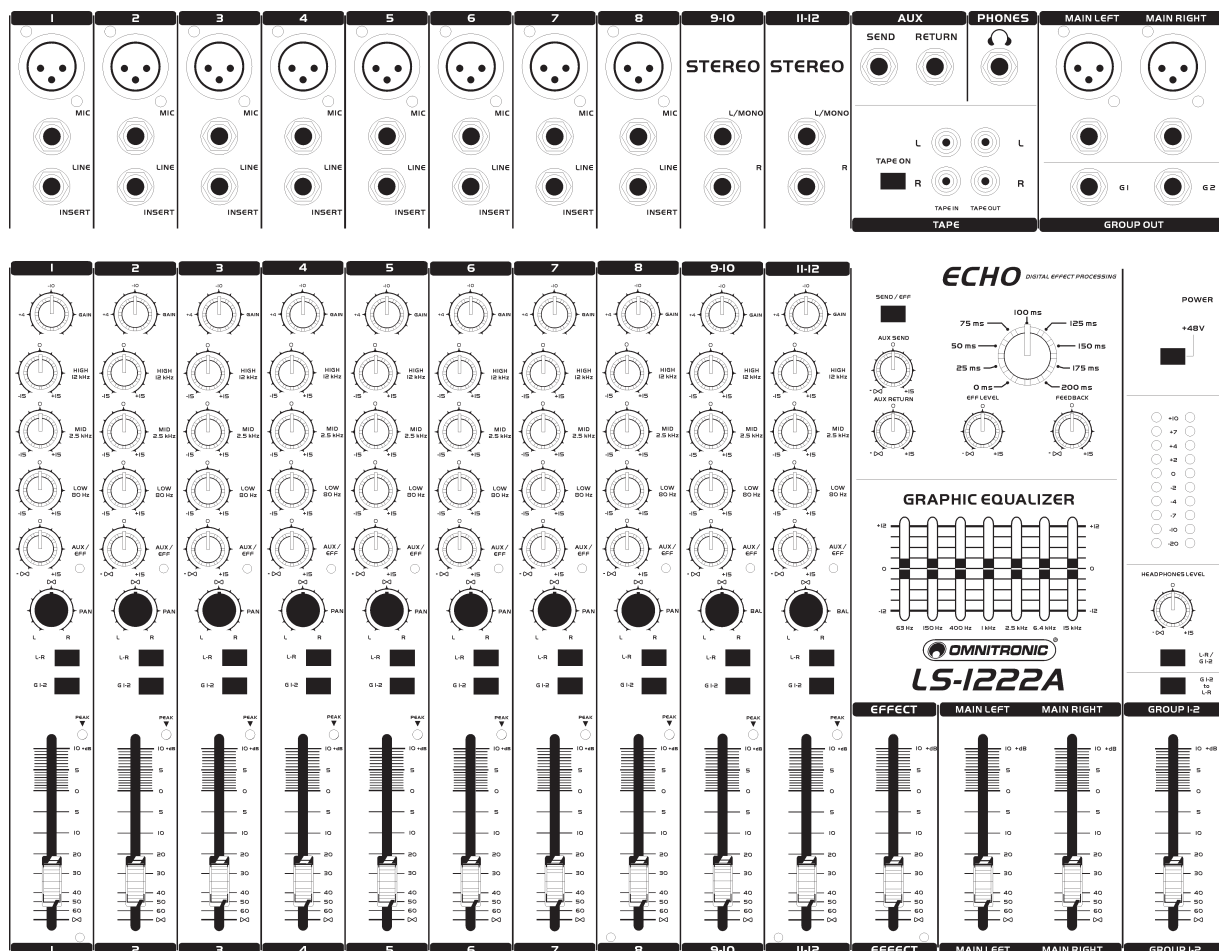


Universal live mixer

- Low noise 12 channel Mic/Line-mixer
- 2/8 mono inputs with XLR-sockets, +48V Phantom-power and balanced line inputs
- Insert or Direct Out for every mono channel
- 2 stereo inputs via balanced jacks
- Integrated multi effect unit
- 4-band EQ for all inputs
- Peak-LED per input
- 2 Aux-Send (1 pre, 1 post) per channel for controlling the effects and for monitoring
- 2 mono Aux-Return with balanced 1/4" jack sockets
- Separate Main Mix, Group and headphones outputs
- Tape inputs and outputs
- 7-band-equalizer for fine-tuned sound
- Precise 10-LED meter
- Output power 2 x 300 W/4 Ohms

**Technical specifications:**

Power supply: 115/230 V AC, 50/60 Hz ~
 Power consumption: 800 W
 Inputs:
 2/4 mono XLR or balanced 1/4" jacks
 2/4 inserts 1/4" jacks
 2 stereo balanced 1/4" jacks
 1 Aux-Return balanced 1/4" jack
 Tape In RCA
 Outputs:
 1 Main Mix Out XLR or balanced 1/4" jacks
 1 Headphones balanced 1/4" jack
 1 Aux-Send balanced 1/4" jack
 2/4 Direct Out 1/4" jacks
 Tape Out RCA
 Frequency range:
 Microphone: 10 Hz - 60 kHz, ± 3 dB
 Mono: 10 Hz - 60 kHz, ± 3 dB
 Stereo: 10 Hz - 55 kHz, ± 3 dB
 Distortion: 0.01 %
 S/N-ratio: 112 dB
 Tone control/channel:
 Treble: ± 15 dB at 12 KHz
 Middle: ± 15 dB at 2.5 KHz
 Bass: ± 15 dB at 80 Hz
 Power output sine:
 Stereo 4 Ohms 2 x 300 W
 Dimensions (WxDxH): 550 x 390 x 125 mm
 Weight: 13 kg
 Fuse 230 V: T 7 A, 250 V
 Fuse 115 V: T 14 A, 250 V