


CELTO PM15 G3 2-way Fullrange Loudspeaker

Perfectly built speaker

Art. No.: 11043684

GTIN:

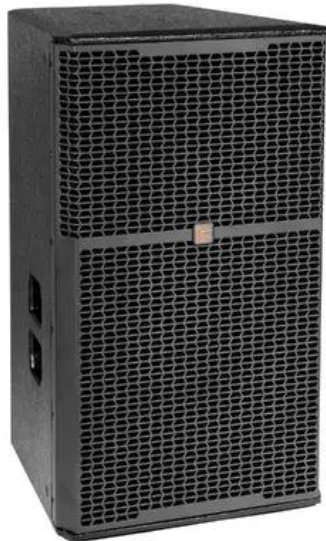

Features:

- Horn 90 degree rotatable for horizontal or vertical use
- Complies with DIN 18032-3 (Ball-proof)
- Dual flange
- With rigging points
- Built with NEUTRIK connector
- CELTO ACOUSTIQUE driver
- For application areas such as: Theater; music school; concerts/FoH's; restaurants, bars and hotels; sports centres/gyms; architecture; multi-purpose hall

Logistic

Technical specifications:

| | |
|--------------------|--|
| Power: | Peak: 3200W Program: 1600W Rated: 800W AES |
| Frequency range: | 38 - 22000 Hz |
| Sensitivity: | 98 dB (1W/1m) |
| Max. SPL: | 133 dB |
| Dispersion angle: | 80° x 50° rotatable horn |
| Impedance: | 8 ohms |
| Standard: | DIN 18032-3 (Ball-proof), |
| Attachment system: | Dual flange: Ø 35mm (0° / 10°) |

| | |
|-----------------------|---|
| Flying points: | 16 x M8 thread |
| Connections: | Speaker via 2 x 4-pol SpeakON mounting version (F) |
| Crossover frequency: | Passive 1400 Hz Recommended 35 Hz, 24db/oct in full-range mode 60-140 Hz with subwoofer |
| Speaker: | 1 x woofer 15" with ferrit magnet Basket material: aluminum Voice coil woofer in/out wound 3.5" 1 x annular compression driver 1" with ferrit magnet Voice coil annular 1.75" Diaphragmmaterial: PEEK (H.T. polymer) |
| Type of speaker: | Compact cabinet speaker |
| Type of construction: | Transmission line |
| Use of brands: | Built with NEUTRIK connector CELTO ACOUSTIQUE driver |
| Material: | Birch multiplex, CNC made with tongue and grove assembly |
| Color: | Black, textured coating, painted |
| Dimensions: | Width: 41.0 cm Depth: 45.0 cm Height: 72.0 cm |
| Weight: | 30.65 kg |

Scope of delivery:

1 x top