


## CELTO ACS218 Subwoofer Active

2 x 18" active subwoofer with DSP and 3000 W for the ACS10 line array system

Art. No.: 11043716

GTIN:

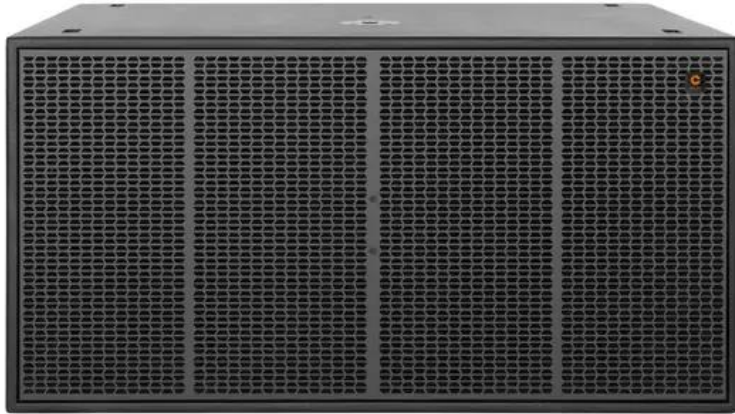

**List price: on demand €**

incl. 19% VAT.

### Description:

ACS 218 is a high-performance, 2x18" 3000W self-powered subwoofer engineered to deliver deep and accurate low-frequency reproduction well below 40Hz.

Designed as a companion for the ACS10 line source, it provides powerful low-end extension with advanced onboard amplification and DSP control.

### Features:

- Clean and deep reproduction
- Premium custom made driver
- Heavy braced cabinet for vibration free dynamic response
- Rubberized Polyurea coating
- Wheels optional
- 8 x rubber feet
- **integrated amplifier module**
- Digital signal processor
- DSP presets: FLAT; KICK; DEEP
- The device is cooled by temperature-controlled fan
- Monochrome LCD display
- For further information about this product, please refer to the Data Sheet under "Downloads"

### Logistic

### Technical specifications:

Power:

Rated: 3000W

Frequency range:	30 - 95 Hz
Max. SPL:	139 dB
Dispersion angle:	Omnidirectional
Impedance:	4 ohms speaker
Attachment system:	2x M20 thread
Speaker:	2 x woofer 18" with ferrit magnet Basket material: aluminum Voice coil woofer in/out wound 4" Conematerial: weatherproof Cardboard/paper
Type of speaker:	Subwoofer
Type of construction:	Vented
Transport aid:	Wheels optional 8 x rubber feet
Material:	Birch multiplex
Color:	Black, rubberized Polyurea coating, painted
Dimensions:	Width: 110 cm Depth: 74 cm Height: 58 cm
Weight:	83.00 kg
Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	1500 W
Protection class:	Protection class I
Output power:	Max. 6000 W 3000 W RMS
Power connection:	Mains input via PowerCON (blue), mounting version power supply cord with safety plug included
Power output:	PowerCON (gray), mounting version
DSP:	Digital signal processor
DSP presets:	FLAT; KICK; DEEP
Cooling:	2 x temperature-controlled fan
Circuitry:	Class D
Display type:	Monochrome LCD display
Control elements:	Power switch, DSP preset switch
Controls:	Overheat; short-circuit; DC voltage; limiter
Status LED:	Power, signal, limit, protect
Connections:	Input: mono via 3-pin XLR (F) mounting version USB A (F) mounting version Link: mono via 3-pin XLR (M) mounting version
Cable construction:	3 x 1.5 mm <sup>2</sup> H05VV-F
Cable length:	2 m detachable

### Scope of delivery:

1 x bass  
1 x power cord