


## EUROLITE Set 4x LED PIX-16 QCL Bar + Case

Art. No.: 20000992

GTIN: 4026397728422

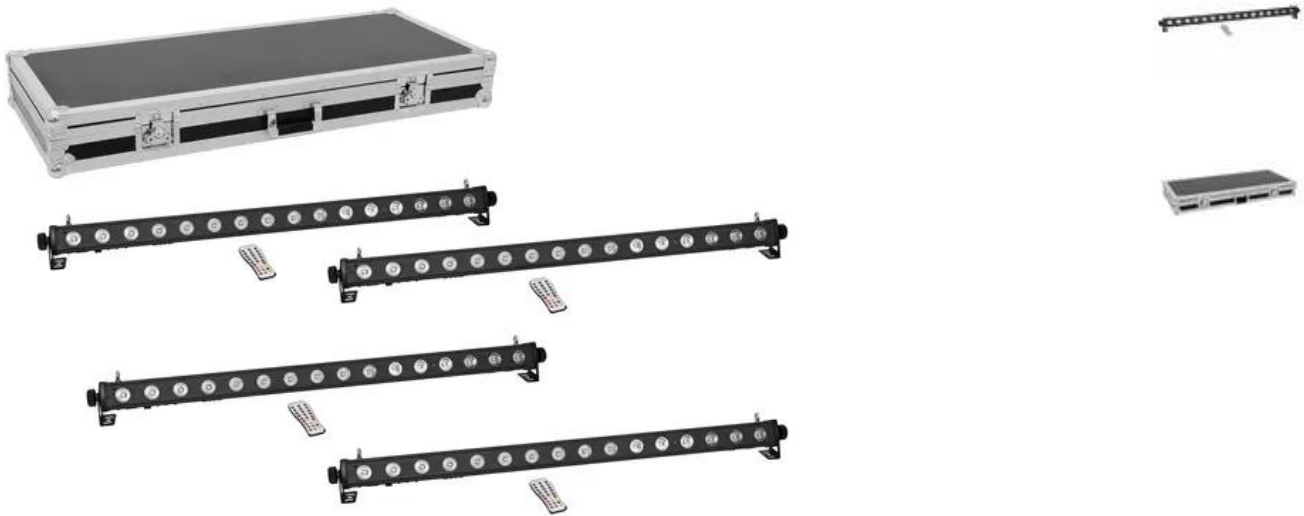

**List price: 1069.81 €**

incl. 19% VAT.

### Features:

#### EUROLITE LED PIX-16 QCL Bar

LED light effect bar with 16 x 4 W RGBW LED (4in1), incl. IR remote control

- 16 powerful LEDs 4 W COB (chip-on-board) 4in1 QCL RGBW (homogenous color mix)
- Strobe effect
- 21 integrated show programs
- Direct color selection for 15 preset colors
- The device is cooled by passive convection cooling
- Control via stand-alone; master/slave function; DMX; QuickDMX via USB (optional); W-DMX by wireless solution via USB (optional); CRMX by LumenRadio via USB (optional); sound to light via microphone; IR remote control
- Preprogrammed in Light´J; Light Captain; Colorchief
- Flicker-free
- With a beam angle of 15°
- With mounting bracket
- 4 digit 7-segment LED display
- Mains input and output for power linking up to 8 units
- For application areas such as: Clubs/dancing school; party room; installation; restaurants, bars and hotels
- Silent operation
- Application possibility: Suspended; wall mounting

#### Package contents

- 1 x bar, 1 x user manual, 1 x power cord, 1 x remote control, 1 x battery, 2 x mounting bracket, 2 x screw, 2 x washer

### Logistic

EAN / GTIN: 4026397728422

Weight: 24,00 kg

Length: 0.00 m

Width: 0.00 m

Height: 0.00 m

## ROADINGER Flightcase EC-B252 4x LED BAR-252 RGB

### Carrying case

- High-quality workmanship with plywood multi-layer glued 7 mm, black, laminated
- Interior with foam padding
- Aluminum profile frames 30mm with rounded edges
- Rugged carrying handle
- 3 chrome tip-over locks
- 2 high-quality butterfly locks
- For further information about this product, please refer to the Data Sheet under "Downloads"

## Technical specifications:

Weight:	20,46 kg
---------	----------

## EUROLITE LED PIX-16 QCL Bar

Power supply:	100-240 V AC, 50/60 Hz
Power consumption:	70 W
IP classification:	IP20
Protection class:	Protection class I
Power connection:	Mains input via P-Con (blue), mounting version power supply cord with safety plug
Power output:	P-Con (gray), mounting version
Fuse:	F 1 A fuse replaceable
Lamp type:	LED lamp
LED type:	16 x 4 W COB (chip-on-board) 4in1 QCL RGBW (homogenous color mix)
DMX channels:	3; 4; 11; 21-1; 21-2; 64
DMX input:	3-pin XLR (M) mounting version
DMX output:	3-pin XLR (F) mounting version
Cooling:	Passive convection cooling
Control:	Stand-alone; master/slave function; DMX; QuickDMX via USB (optional); W-DMX by wireless solution via USB (optional); CRMX by LumenRadio via USB (optional); sound to light via microphone; IR remote control
Preprogrammed in:	Light´J; Light Captain; Colorchief
Projection:	Flicker-free
Beam angle:	15°
Beam angle (1/2 peak):	15°
Beam angle (1/10 peak):	30°
Housing color:	Black
Attachment system:	2x mounting bracket
Display type:	4 digit 7-segment LED display
Dimensions:	Length: 108 cm Width: 6,5 cm

	Height: 8,5 cm
Weight:	2,39 kg
Noise classification:	Class 0 (no noise at all)
Remote control	
Battery:	1 x button cell 3.0 V CR2025 lithium manganese built-in
Legal specifications	
Special product:	Not designed for household room illumination
Intended use:	Show effect lighting

#### **ROADINGER Flightcase EC-B252 4x LED BAR-252 RGB**

Maximum load:	25 kg
Aluminum profile frames:	30 mm
Carrying handle:	1 pc/pcs
Stop hinge:	3 pc/pcs
Lock:	Butterfly lock: 2 pc/pcs
Material:	Plywood multi-layer glued, 7 mm
Color:	Black, laminated
Inside dimensions:	108 cm x 44 cm x 7,5 cm
Device compartment:	108 cm x 6,5 cm x 7,5 cm
Dimensions:	Width: 117 cm Depth: 48 cm Height: 17 cm
Weight:	10,90 kg