


## EUROLITE LSD-75 MK2 (H)2.4m x (W)1.2m

LED soft displays

Art. No.: 80503244

GTIN: 4026397459777

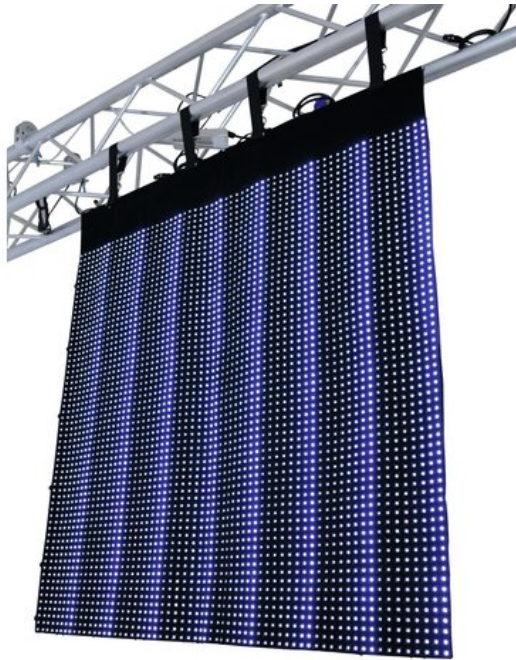

**The article is no longer in our assortment.**

### Features:

- Flexible displays with tricolor RGB LEDs (type SMD 5050) for bright and colorful projection of videos and graphics
- Improved version with even brighter LEDs
- Proven connector system with push buttons and hook-and-loop connections
- Modular display concept allows the build-up of large areas, ideal for outdoor use with large viewing distances
- Bendable and foldable PVC material suitable for various shapes, e.g. columns, circles, angles
- Fast and uncomplicated installation, indoor and outdoor (IP44)
- Truss suspension via built-in belts
- Water-repellent and flame-resistant
- Low weight and small volume for convenient transport
- Easy maintenance - LEDs can be replaced without difficulty
- Controllable via optional network components and PC software
- All-in-one control system T9 (80503301): network interface and software LED Show T9 - ideal system for mobile use with notebooks with 1-gigabit NIC
- Control system LED studio: receiver interface (80503311), PCI sending card and software LED Studio (80503130)
- Recommended media software: MADRIX
- Switch-mode power supply for operation between 100 and 240 volts
- Power output for passing on the power supply
- Available in different sizes and pixel pitches
- Custom sizes available upon request (in 1.2 m units)

### Logistic

EAN / GTIN: 4026397459777

Weight: 14,10 kg

Length: 1.12 m

Width: 0.63 m

Height: 0.15 m

## Technical specifications:

|                        |                                                                |
|------------------------|----------------------------------------------------------------|
| Power supply:          | 100-240 V AC, 50/60 Hz                                         |
| Power consumption:     | 12,00 W                                                        |
| IP classification:     | IP44                                                           |
| Dimensions:            | Width: 1,2 m<br>Height: 2,4 m                                  |
| Resolution (W x H):    | 16 x 32 pixels                                                 |
| Pixel pitch:           | 75 mm                                                          |
| Pixel density:         | 177/m <sup>2</sup>                                             |
| Pixel configuration:   | tricolor RGB LEDs, type SMD 5050                               |
| Lifetime:              | approx. 100000 hours                                           |
| Display port:          | DVI/RJ45                                                       |
| Display mode:          | synchronous to video source                                    |
| Drive mode:            | 1/8 scan                                                       |
| Screen resolution:     | max. 1280 x 1024 (LED Studio)<br>max. 1024 x 896 (LED Show T9) |
| Brightness:            | 172 cd/m <sup>2</sup> (nits)                                   |
| Viewing angle:         | 110°                                                           |
| Frame rate:            | 60 Hz                                                          |
| Data refresh rate:     | 600 Hz                                                         |
| Colors:                | 16.7 million (R 256, G 256, B 256)                             |
| Protection grade:      | IP44                                                           |
| Operating temperature: | -10 to 45 °C                                                   |
| Humidity:              | 10 to 90 %                                                     |
| Dimensions (W x H):    | 1200 x 2400 mm                                                 |
| Weight:                | 2.2 kg/m <sup>2</sup>                                          |
| Legal specifications   |                                                                |
| Special product:       | Not designed for household room illumination                   |
| Intended use:          | Show effect lighting                                           |