

▶ INTUGRID SPA22 ◀

REMOTE POWER SUPPLY STATION

PREAMPLIFIER




CONCEPT

The INTUPAK™ SPA22 addresses the simple yet decisive question of how to power wall-mounted devices. With a plethora of wall-mounted preamplifiers, amplifiers and wireless receiver panels in the market, most manufacturers count on the installers' ability to hide a wall wart in a drywall or run a long low-voltage cable from a remote location. Intusonic however delivers the smarter answer in the shape of a sleek and flexible PSU, fitting just into a standard BS5733 wall box offering flush or surface mount options like other Intusonic wall-mounted products. With its symmetrical +12V low-noise DC output, it provides the groundwork for great, high-headroom audio quality. And with terminal strip outputs plus IntuLink™ in-line RJ45 connections with data throughput and power refresh, it can power both stand-alone preamp products like the VAA22 or provide long-distance power beyond a zoner's on-board supply abilities to IntuGrid™ wall panels.

FEATURES

- ▶ Switching power supply topology with excellent efficiency and low heat emission
- ▶ Wide-range AC supply input: 85-265V, 50-60Hz
- ▶ Symmetrical low-noise/low-ripple DC output +12V
- ▶ Generous current delivery of 500mA per output (6W @ +12V, 6W @ -12V)
- ▶ Illuminated Power on/off switch
- ▶ Dual 3.5mm terminal strips for connection of powered products
- ▶ Dual RJ45 IntuLink™ connectors, with data-through and power refresh connection
- ▶ 86x86mm standard size with BS5733-compliant mounting points
- ▶ Single-gang BS5733 wall box (white) supplied with the product
- ▶ CE/ROHS compliant

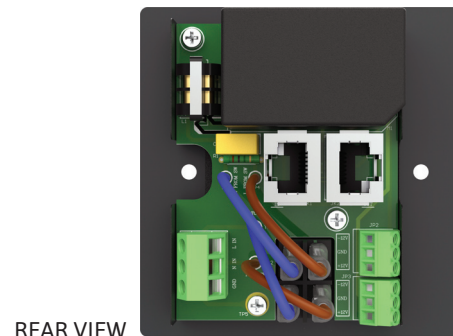

TECHNICAL DATA

AC Input	85-265V AC, 50-60Hz
Output 1.....	+12V DC, 500mA (6W)
Output 2.....	-12V DC, 500mA (6W)
Output Connection A.....	3.5mm Terminal Strip
Output Connection B.....	IntuLink™ RJ45 in-line
Dimensions WxDxH.....	86x86x50 mm (/w knob)
Mounting depth.....	43mm
Mounting Standard.....	BS5733
Weight.....	0.16kg

LOGISTICS DATA

Order Number.....	2023301
Single unit EAN-13.....	5060502923561
Single Carton (SC) size WxDxH.....	103x103x80mm
SC gross weight.....	0.21 kg
Units per master carton (MC).....	8
MC size WxDxH.....	220x220x180mm
MC gross weight.....	2.58 kg

PREAMPLIFIER