


EUROLITE Safety Bond B 4x1000mm up to 15kg black

Approved safety bond

Art. No.: 58010345

GTIN: 4026397569391

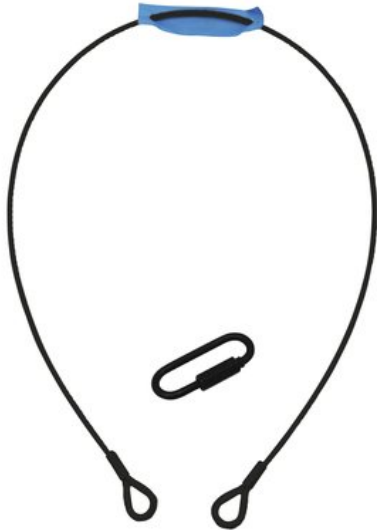

The article is no longer in our assortment.

Features:

Approved safety bond

- Rope with thimble and connector

Logistic

EAN / GTIN: 4026397569391

Weight: 0,09 kg

Length: 0.10 m

Width: 0.08 m

Height: 0.03 m

EUROLITE Steel Rope 1000x4mm black with Thimbles

Installation rope, safety bond, safety

- Round strand rope 6 x 19 with fibre core
- With two thimbles
- Suitable for installing and securing loads above persons
- Complies with DIN EN 12385-4:2008-06 and DIN 56927:2009-03
- Rope with thimble
- For further information about this product, please refer to the Data Sheet under "Downloads"

EUROLITE Quick Link Type B-90 black

Quick link

- Form B (long)
- Galvanized
- Identification number: 90
- Stamp: DIN 56927 B 90
- Test report according to DIN EN 10204 as download
- Complies with DIN 56927:2009-03
- For further information about this product, please refer to the Data Sheet under "Downloads"

Technical specifications:

Secured weight (BGV C1):	Max. 15 kg
Strength classification:	1770
Temperature range:	-40° C - +100° C
Weight:	90 g

EUROLITE Steel Rope 1000x4mm black with Thimbles

Maximum load WLL (5-fold):	175 kg
Design of the core:	6 x 19 FC
Strength classification:	1960
Standard:	DIN EN 12385-4:2008-06, DIN 56927:2009-03
Nominal tensile strenght of rope:	1770 N/mm ²
Wire surface:	Zinc-plated
Color:	Black
Temperature range:	-40° C - +100° C
Dimensions:	Length: 1 m Diameter: Ø 4 mm
Weight:	80 g
Length weigth:	0,0554 kg/m

EUROLITE Quick Link Type B-90 black

Maximum load WLL (5-fold):	180 kg
Standard:	DIN 56927:2009-03,
Shape:	B - big opening
Opening:	0-11,5 mm
Dimensions:	Length: 4,50 cm Diameter: Ø 4 mm
Weight:	10 g